Wejoin Flap Barrier WJTY202
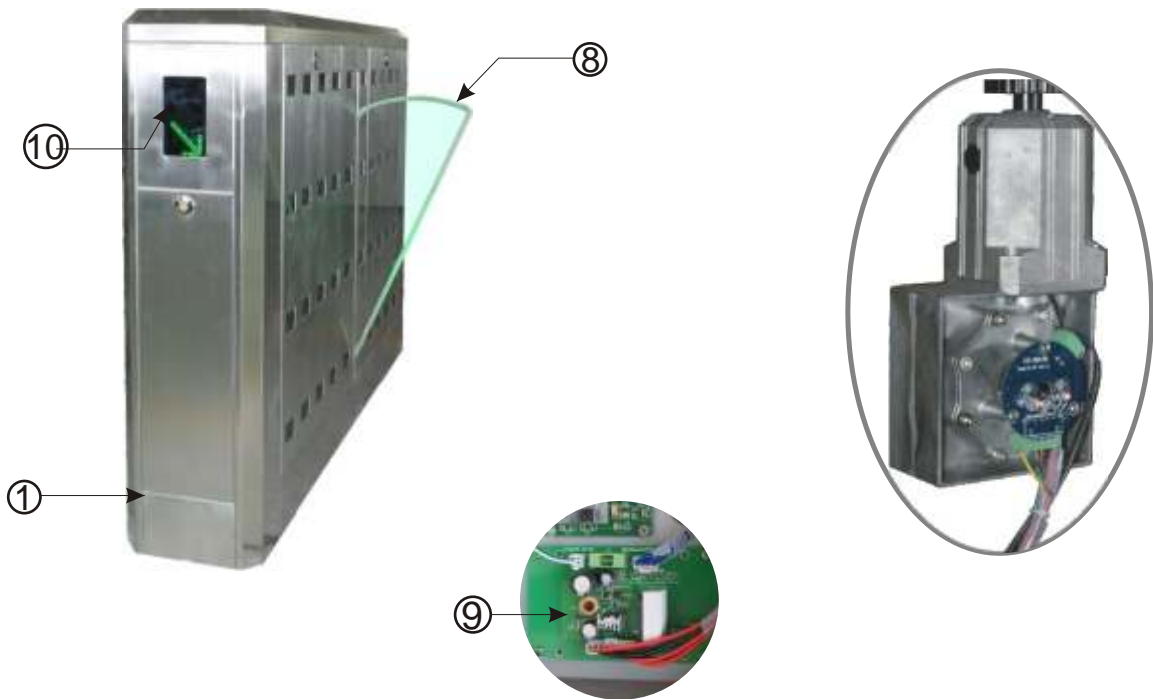
WJTY202

① Inner Structure

② Green Light

③ Red Light

④ Manual Release

Functions & Features

1. Stainless steel housing
2. Bi-direction pass
3. Interface for variety of card reader devices: IC / ID card reader, bar code, fingerprint, etc.
4. Auto reset:Passage will be locked up if passager does not pass in valid time. The standard passing time is 5 seconds.
5. Auto open when power off, and auto close when power on
6. Fault self-cheching, easy for use and maintenance
7. Users can set the device running status with the buttons on the control panel
8. Infrared anti-cliping, reversing on obstacle
9. Alarm system can avoid unallowed pass
10. LED direction indicator
11. RS232 socket, LAN socket
12. Passenger counter (optional)

Technical Data

Voltage	220V±10%, 110V±10%
Frequency	50/60Hz
Control Circuit	DC12V
Consumption	30W
Passing Speed	30-40 persons /min
Working Temperature	-20 ~55
Protection Grade	IP40
Communication Socket	RS232 standard socket/ LAN socket

WJTY202